


## Technical Data Turnstile DK 2 (electromechanical system)

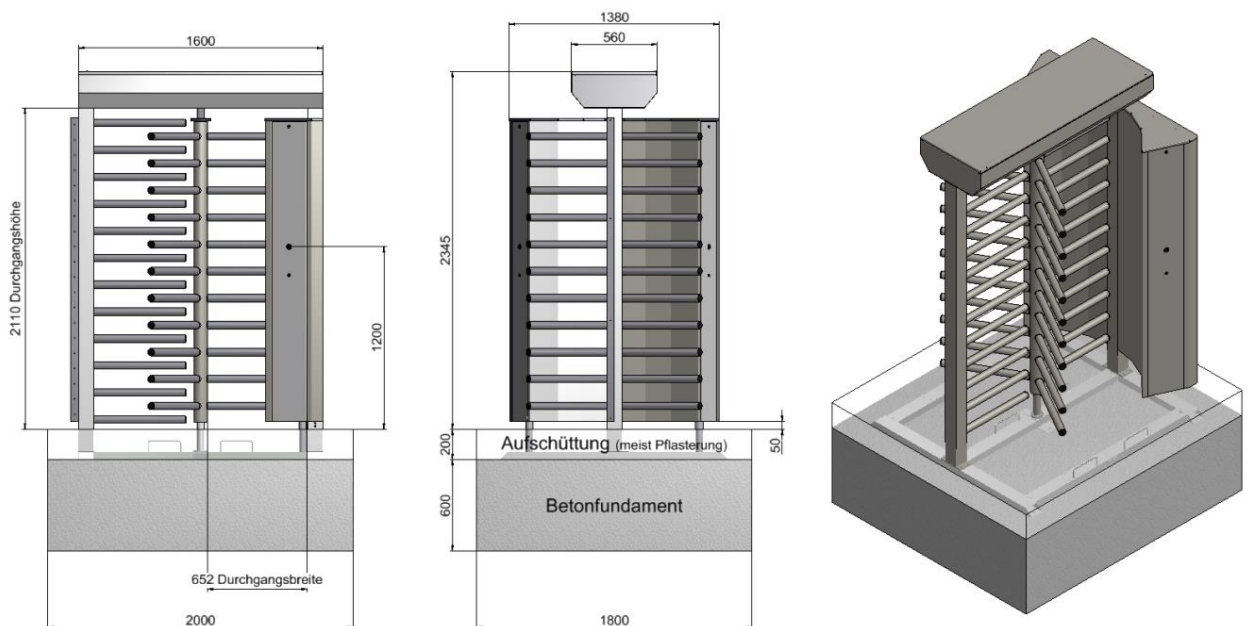

<b>Outside dimensions</b>	W=1.6 m; H=2.4 m (paved); T=1.4 m
<b>Access dimensions</b>	Access height 2.11 m; Access width 0.65 m
<ul style="list-style-type: none"> <li>- Automated release, manual rotational movement</li> <li>- Stainless steel spindle with 3 x 120° partition</li> <li>- Fixed element arms out of 1½" stainless steel tube</li> <li>- Control electronics in stainless steel top box; power supply 230V</li> <li>- Access control components in aluminium side box</li> <li>- Standard powder coating rough structure in RAL7030 (stone grey) or RAL7016 (anthracite grey)</li> <li>- Capacity: ca. 15 persons/minute</li> <li>- Various roof models</li> <li>- Ready to use delivery with transporting and mounting frame</li> <li>- Custom solutions on request (Access widths, color, side passage)</li> </ul> <p style="text-align: center; font-size: small;">Illustrations, weights, dimensions are not binding, technical changes are reserved</p>	