


## Technical Data Electrical Barrier ES 3 / 4

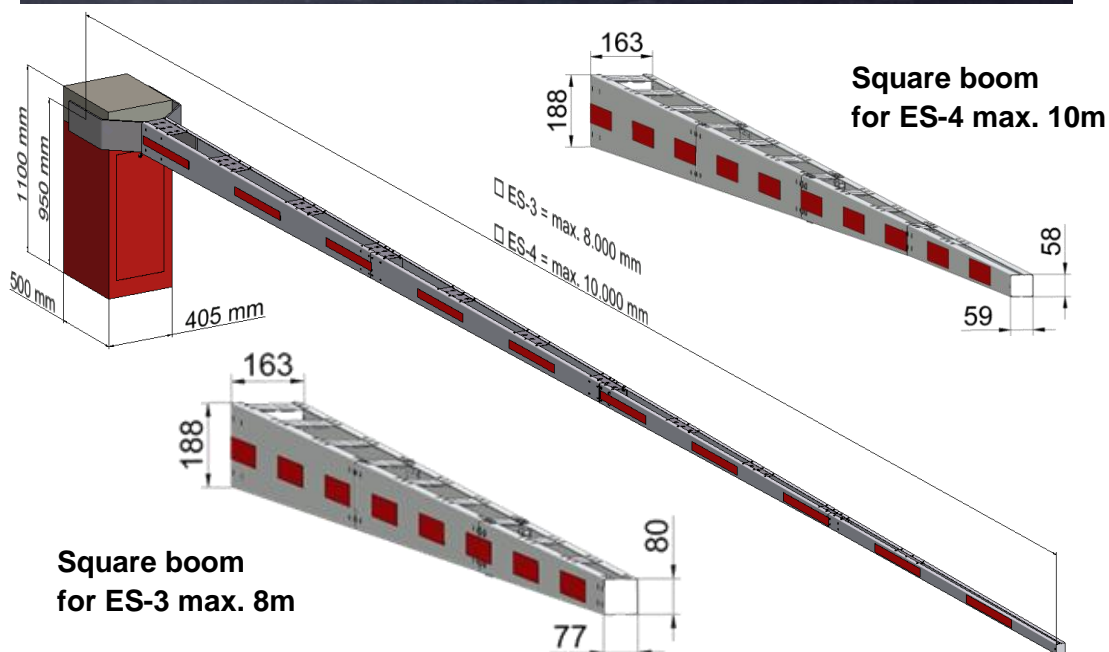

Electrical barrier	ES-3	ES-4
<b>Motor</b>	230 V	ES-3/4 = 50 Hz; 0,37 KW, 1400 /min
<b>Housing</b>	Stainless steel Housing of ES-4 is reinforced	
<b>Gearbox</b>	Spur-gearbox with friction clutch i=600:1	
<b>Limit switch</b>	Reed-switch: contactless, no freezing	
<b>Power consumption</b>	At 230 V   0,9 A during running time	
<b>Engine control</b>	Micro processor control	
<b>Running time</b>	OPEN/CLOSE: ES-3 = 6,0 sec.   ES-4 = 11,0 sec.	
<b>Color (Standard)</b>	RAL3000 (red), RAL7030 (grey)	

Illustrations, weights, dimensions are not binding, technical changes are reserved