



Technical Data Electrical Barrier ES 0 / 1 / 2

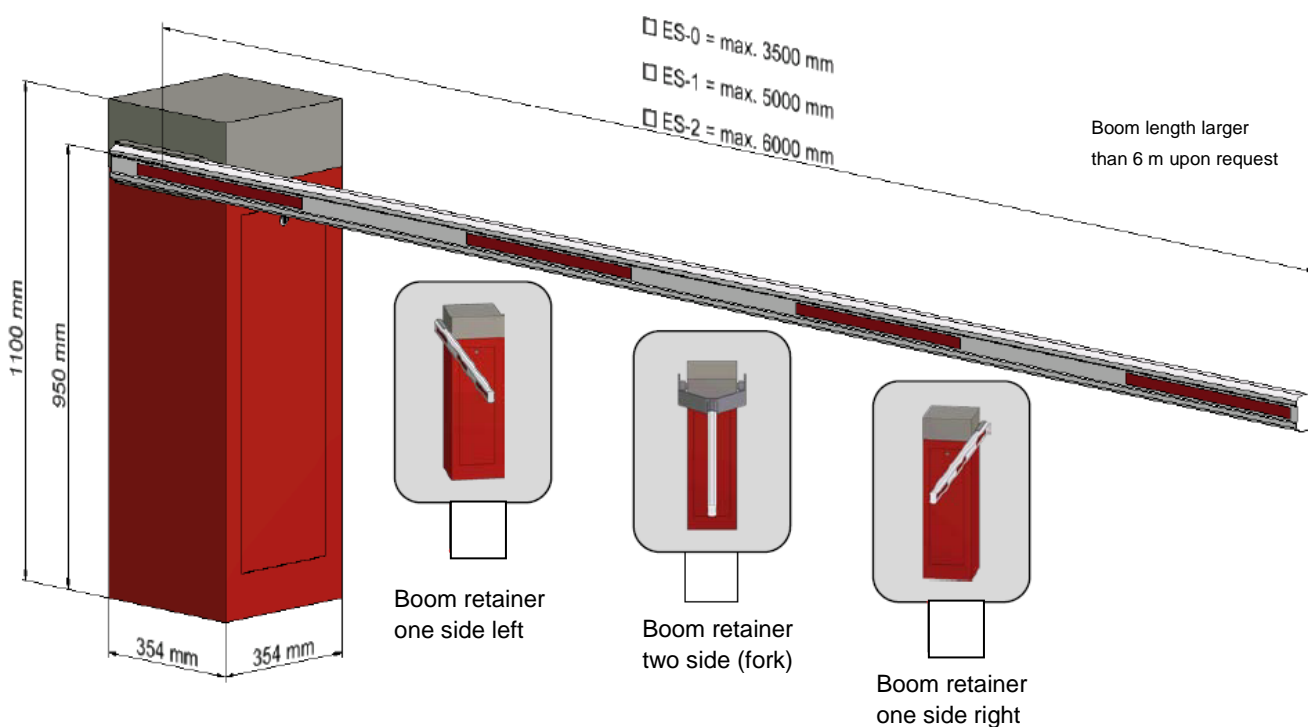

Electrical barrier	ES-0	ES-1	ES-2
Motor	230 V	ES-0/1/2 = 50 Hz; 0.37 KW, 1400 /min	
Housing	Stainless steel		
Gearbox	Spur-gearbox with friction clutch i=212:1		
Limit switch	Reed-switch: contactless, no freezing		
Power consumption	At 230 V 0.9 A during running time		
Engine control	Micro processor control with frequency converter		
Running time	OPEN/CLOSE: ES-0 = 2.1 sec. ES-1/2 = 4.2 sec.		
Color (Standard)	RAL3000 (flame red), RAL7030 (stone grey)		



Polygonal profile

In addition round, diameter 80. 90. 100 mm

Illustration, weights, dimensions are not binding, technical changes are reserved

Kerfa GmbH
 Bereich Axel Tiede Sicherheitstechnik
 An der Kohlenbahn 30
 58135 Hagen
 Deutschland

Telefon: +49 2331 9461-25
 Telefax: +49 2331 9461-48
 E-Mail: info@axel-tiede.de
 Internet: www.axel-tiede.de

Sitz der Gesellschaft: Hagen
 Amtsgericht Hagen HRB 3184
 Steuer-Nr.: 321/5714/0545
 USt-IdNr.: DE126456025

Geschäftsführung:
 Konrad Meyr